


Product Specifications

- Housing:** Die-cast aluminum
- Lens:** Clear
- Mounting:** Pipe Mounting
- Electrical:** AC 90-277v
- Wattage:** 70W/100W/120W
- Finish:** GRAY
- Certification:** cETLus, IP66, CE
- System Light Efficiency:** > 100 lm/W AC90-277V
- IP Grade:** IP65
- Color Temperature:** 4000K、 5000K、 6000K
- Applicable places:** Squares, avenues, pedestrian street, parking lots etc.

IMPAR3

Dimensional Drawings:

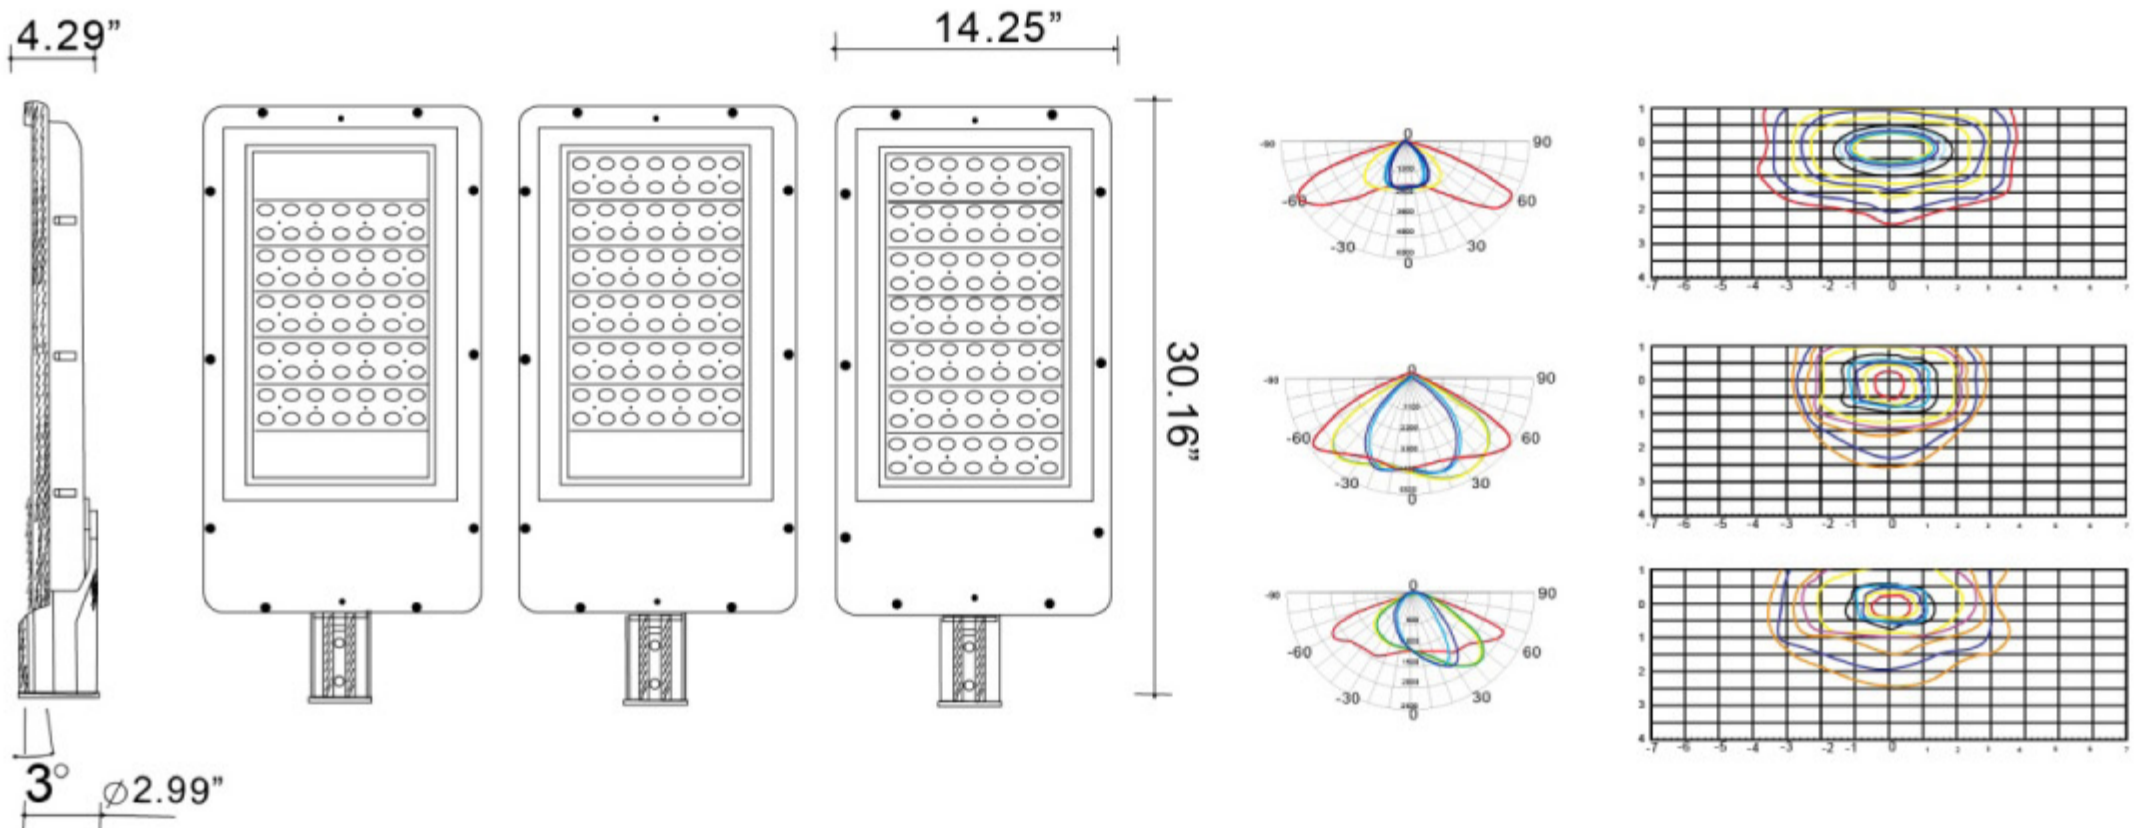

Ordering information

Example: IMPAR3-30-LED-70-U-40-G

| Series | Source | Wattage | Voltage | CCT | Finish | Options |
|------------------------------|---------|--------------------------------|-------------|----------------------------------|-----------|---------|
| IMPAR3 | LED=LED | 70=70W 100=100W 120=120W | U=AC90-277V | 40=4000K 50=5000K 60=6000K | G= (Gray) | |
| Size 30=30x14x4 in | | | | | | |

*Consult Factory regarding availability.

