




Product Specifications

- Housing:** Die cast aluminum housing. One-piece silicone gasket seals hinged door frame.
- Reflector:** Specular anodized aluminum
- Lens:** Prismatic glass reflector
- Mounting:** Wall mount. Attaches to standard 4" outlet box.
- Light Source:** Metal halide or compact fluorescent
- Finish:** Bronze powder coat finish is standard
- Certification:** UL/cUL for Wet location

WP12

Dimensional Drawings:

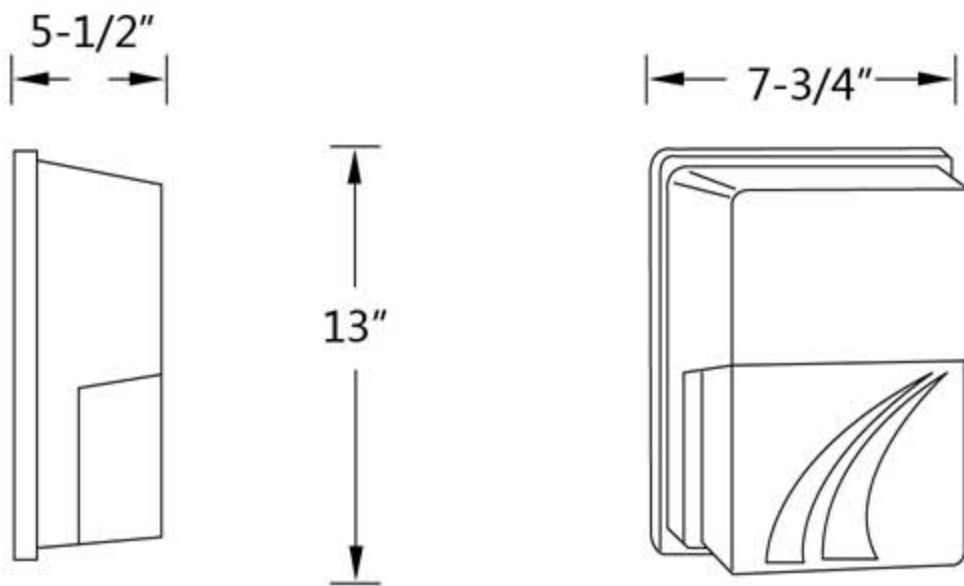

Ordering information

Example: WP12-8-CFL-42-U-B

Series	Size	Source	Wattage	Voltage	CCT	Finish	Options
WP12	8=8	CFL=CFL MH=MH	42=42W 100=100W	U=U (120 thru 277) QU=Quad (120/208/240/277)		B= (Bronze)	

*Consult Factory regarding availability.

