




WP11

Product Specifications

- Housing:** Die cast aluminum housing. One-piece silicone gasket seals hinged door frame.
- Reflector:** Specular anodized aluminum
- Lens:** Prismatic borosilicate glass reflector
- Mounting:** Wall mount. Attaches to standard 4" outlet box.
- Electrical:** 4KV pulse rated medium base socket.
- Light Source:** 250-watt metal halide or 250-watt pulse start metal halide.
- Finish:** Bronze powder coat finish is standard
- Certification:** UL/cUL for Wet location

Dimensional Drawings:

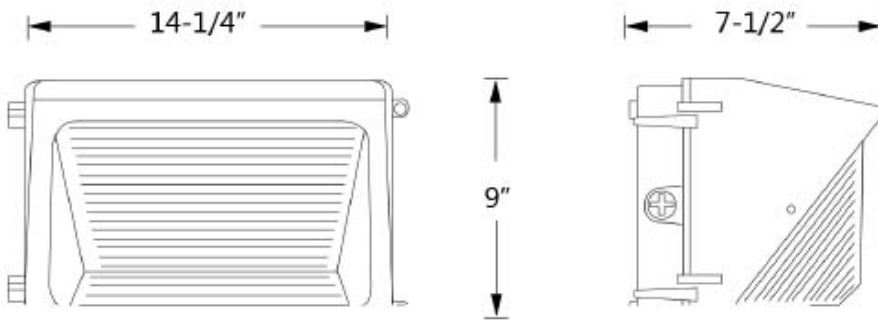

Ordering information

Example: WP11-14-MH-250-QU-B-PC

Series	Source	Wattage	Voltage	CCT	Finish	Options
WP11	MH=MH PS=PSMH	250=250W	QU=Quad (120/108/240/277)	40=(4000K) 50=(5000K)	B= (Bronze)	PC= PC PH= Photo CO= Control (120v only)

*Consult Factory regarding availability.

