

LED LINEAR series

LINEAR LED LIGHT IL-LWW-W35A

Catalog #		Type
Project		
Comments		Date
Prepared by		



Product Description:

This luminaire offers the highest performance and most consistent color binning, available in high and standard outputs with multiple color temperature options.

These Linear fixtures can work in independent mode and DMX mode, which can generate various color changing effects, such as flashing, fading, steady, seven color jumping synchronously etc. DMX256 class gray degree dimmer, DMX programable thousands of effects.

A wide range of optics and color temperatures are available for a variety of floodlighting or grazing applications

Features:

- Low thermal resistance, high efficiency LEDs used, low light decay.
- rate extends LEDs life span to 30,000 hrs.
- The lamp body adopts aviation aluminum, has good heat dissipation performance
- Used for exterior and interior.
- Lumen efficacy up to 110 lumens per watt

Specification:

MATERIAL:

Aluminum alloy + Glass cover

TRIM:

White Aluminum

OPTICS:

15° / 30° / 45° / 15° x 40°

DIMMING:

DMX256 class gray degree dimmer, DMX programable.

Warranty:

Five-years limited warranty.

Electrical:

Input Voltage: 24V
Operating Voltage: 24V DC
Wattage: 10W, 20W

Color Temperature: Single color & RGB
CRI: ≥ 80 or 90
Life Time: 50,000 hours

Certificate:

ETL

Certificate:

IP Protection: IP65 (wet location)


LED LINEAR series

LINEAR LED LIGHT IL-LWW-W35A

Catalog #		Type
Project		
Comments		Date
Prepared by		

Installation Drawing:

Rotating angle: unscrew the screws by spanner, rotate the fixture to correct place you want then screw it tightly.

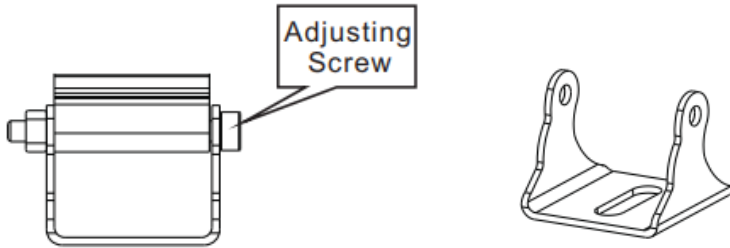

Connection:

a. Steady Color

Rotating angle: unscrew the screws by spanner, rotate the fixture to correct place you want then screw it tightly.




Connection:

b. DMX

Signal max connection is 100m, every 100m or 60pcs fixtures need a signal amplifier.

Optional controller: CTR-ADD-WR, MASTER PRO, Sunlite, DMX-192C, Madrix and other DMX controller.


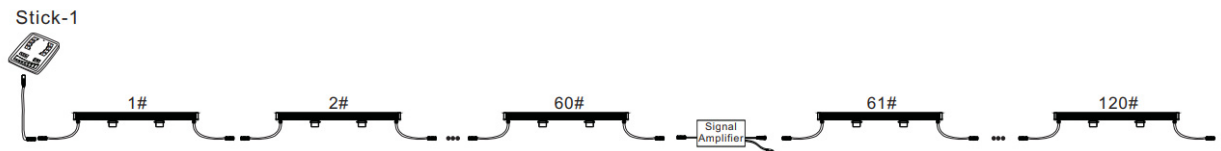


Connention

LED LINEAR series

LINEAR LED LIGHT IL-LWW-W35A

DIMENSIONS & PHOTOMETRICS:

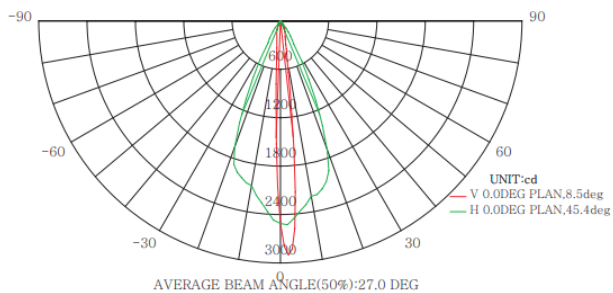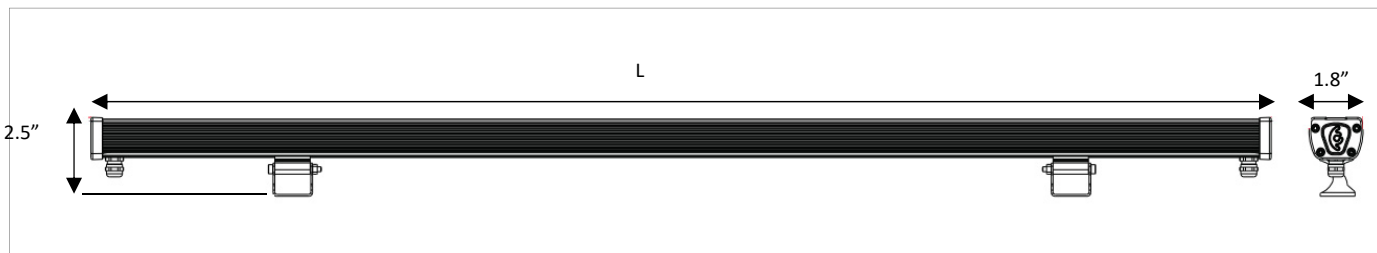

Ordering Example: IL-LWW-W45A-1-1-1

Series	Power	Length	Color Temperature	Beam	Finish	Dimmable
IL-LWW-W35A	1 = 10W	2.0 ft	27K = 2700K	1 = 15°	1 = Aluminum 2 = White	1 = Non-Dimmable 2 = DMX
	2 = 20W	4.0 ft	30K = 3000K	2 = 30°		
	Custom	Custom	40K = 4000K	3 = 45°		
			50K = 5000K			
			RGB = RGB			