




LFL07 LED 48W

Applications

COB LED floodlights with two styles of gear boxes, multiple beam angle options and glare shields for mounting on ground, walls and lawns in commercial and residential applications of accent lighting, façade lighting and landscape lighting.

Dimensions

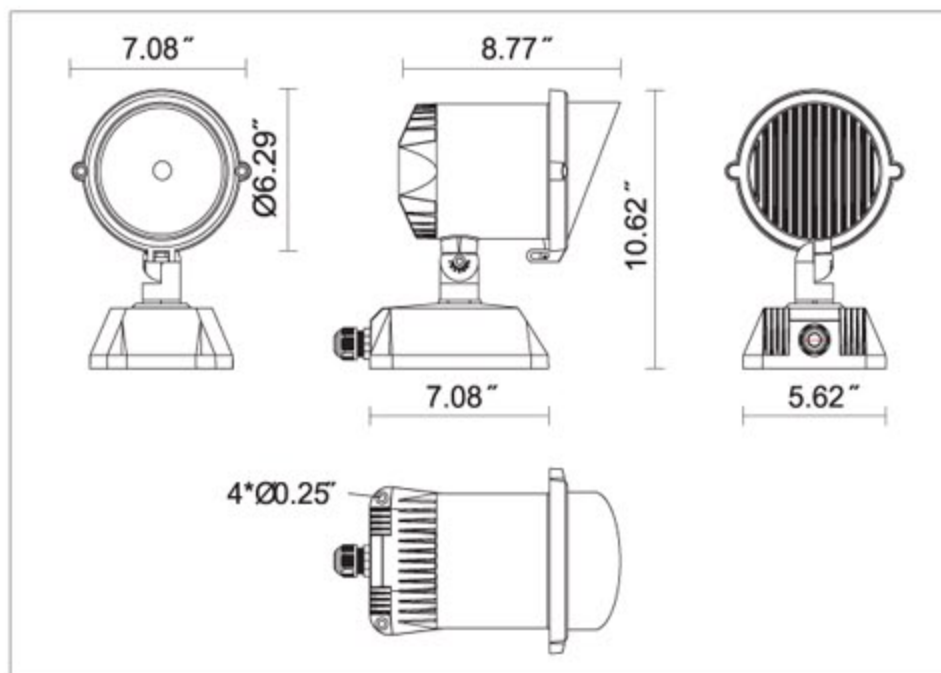

Specifications

















Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
Reflector	Anodized aluminum 1090
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
CCT	3000K - 4000K - 5000K
Beam Angle	15° / 30° / 45°

LED Lumens	3000K - 3750 lm
	48W 4000K - 4070 lm
	5000K - 4380lm

Ingress Protection	IP65
--------------------	------

Certifications	 
----------------	---

Options and Accessories

Cover Frame	 Ring  Upper visor  Full visor
Housing Color	 Black  White  Gray
 Round Gear Box  Trapezoid Gear Box  Horizontal spread  Vertical spread  Honeycomb Louver	
 Standard: Ground Mounting  Standard: Wall Mounting  Bracket Mounting  Tree strap  Ground Stake	

Ordering Guide:

Example: **LFL07 - B48 - 4 - 30 - 80 - CV - T - B**

1 Series	2 Power	3 CCT	4 Beam angle	5 Ra	6 Cover Frame	7 Gear box	8 Housing Color	9 Accessories
LFL07	B48: Bridgelux COB 48W	3: 3000K 4: 4000K 5: 5000K	15: 15° 30: 30° 45: 45° AH: H55°xV20° AV: H20°xV55°	80: Ra80 90: Ra90	CR: Ring CV: Upper visor CF: Full visor	R: Round T: Trapezoid	B: Black W: White G: Gray	S: Ground Stake P: Tree strap H: Honeycomb B3: 3ft bracket B6: 6ft bracket M: Marine ambient corrosion resistance