



Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Top Cover	Clear Tempered Glass
LED Optic	PMMA Lens
Cover Ring	Stainless steel
Driver Type	Constant current
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
CCT	3000K - 4000K - 6000K-R-G-B-RGB
Beam Angle	15° / 30° / 45° / 20°x45°
LED Lumens	3000K - 285lm 4W 4000K - 300lm 6000K - 330lm

LIGR01 LED 4W

Applications


Small and inconspicuous in-grade uplight with full ranges of LED source, photometric and control options, ideally suited for short set-back burial installations in concrete and lawns to highlight architectural features on walls and to light up trees and bushes.




Certifications



Dimensions

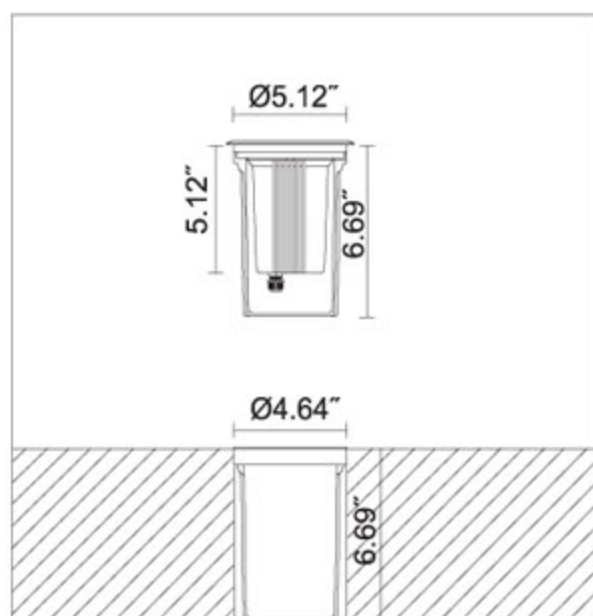

Photometric data

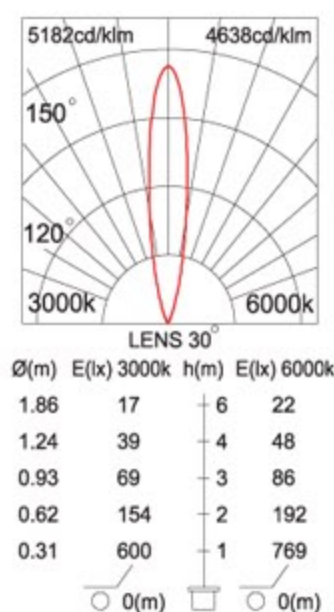

Accessories



Ordering Guide:

Example: LIGR01 - C4 - 3 - 15 - 80 - S4 - NDM

1	2	3	4	5	6	7	8
Series	Power	CCT	Beam angle	Ra	Cover Ring	Control	Accessories
LIGR01	C4: Cree 1Wx3	3: 3000K 4: 4000K 6: 6000K R: Red G: Green B: Blue RGB: RGB	15: 15° 30: 30° 45: 45° 2045: 20°X45°	80: Ra80 90: Ra90	S4: 304 Stainless steel S6: 316 Stainless steel	NDM: No dimming DMG: 0-10V Dimming DMX: DMX Decoder	H: Honeycomb Louver M: Marine ambient corrosion resistance